COMBINATION INSTALLATIONS

dacor The Life of the Kitchen®

ER30DSR Range with ERV/PRV30 Raised Vent

PLANNING GUIDE

⚠ WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- All appliances must be installed in accordance with the accompanying installation instructions.

Cutout tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated

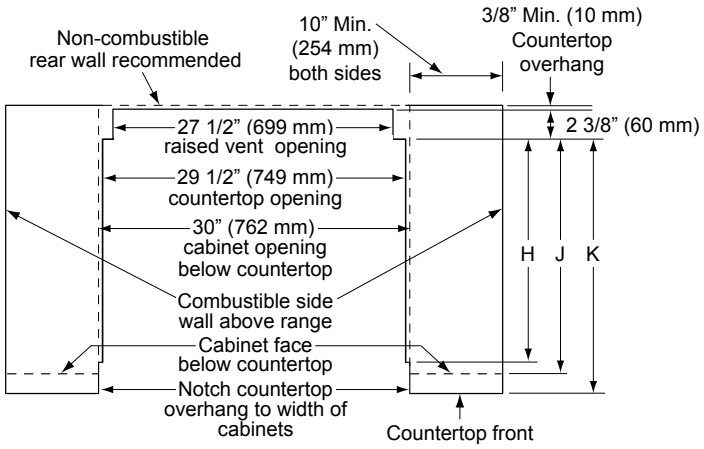
Non-combustible rear wall recommended
10" Min. (254 mm) both sides
3/8" Min. (10 mm) Countertop overhang
27 1/2" (699 mm) raised vent opening
29 1/2" (749 mm) countertop opening
30" (762 mm) cabinet opening below countertop
Combustible side wall above range
Cabinet face below countertop
Notch countertop overhang to width of cabinets
2 3/8" (60 mm)
H
J
K
Countertop front

Countertop Height: Min: 35 5/8" (905 mm) Max: 37 1/4" (946 mm)

ER30DSR/ERV30 Combination with	H	J	K
no side panels	24" (610 mm)	24" (610 mm)	24 1/2" to 26 1/16"
3-inch side panels	21" (533 mm)	21" to 24"	21 1/2" to 26 1/16"

TOP VIEW - MODEL ER30DSR COUNTERTOP/CABINET CUTOUT DIMENSIONS, (ATK30SR TRIM KIT INSTALLED)
APPROVED RAISED VENTS: ERV30 OR PRV30

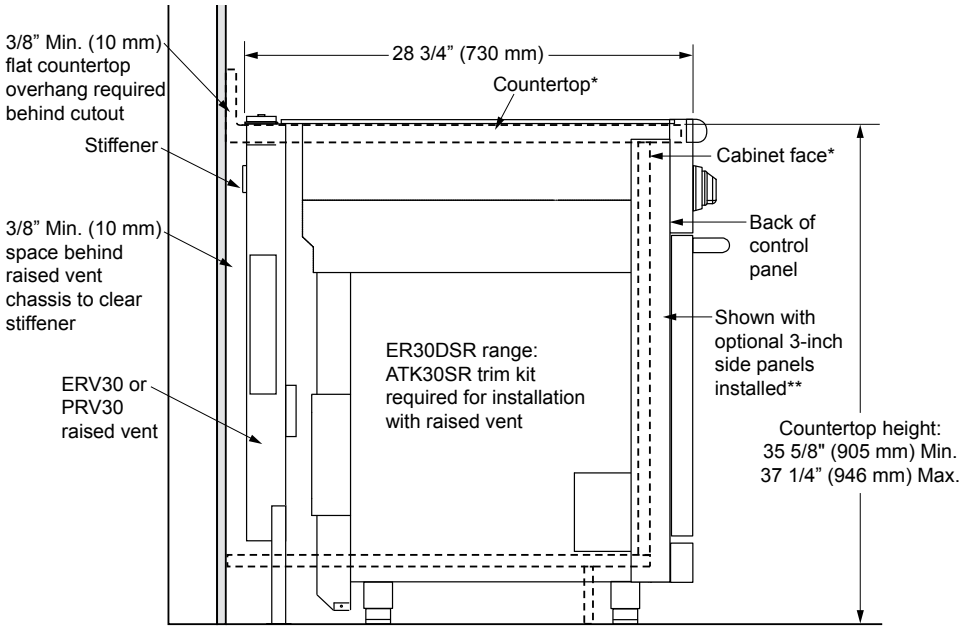
3/8" Min. (10 mm) flat countertop overhang required behind cutout
Stiffener
3/8" Min. (10 mm) space behind raised vent chassis to clear stiffener
ERV30 or PRV30 raised vent
28 3/4" (730 mm)
Countertop*
Cabinet face*
Back of control panel
Shown with optional 3-inch side panels installed**
ER30DSR range: ATK30SR trim kit required for installation with raised vent
Countertop height: 35 5/8" (905 mm) Min. 37 1/4" (946 mm) Max.

* **IMPORTANT**: See Countertop/Cabinet Cutout Dimensions for countertop cutout dimensions.

** **IMPORTANT**: If optional 3-inch side panels are not installed cabinet face must be flush with back of control panel.